

316


Boulder Grab



Boulder grab transporting irregular blocks.

- *Large clamping range*
- *Adjustable suspension eye*
- *Large rotating range*
- *Large gripping depth*
- *Low weight*

The ideal grab for heavy, irregular blocks.

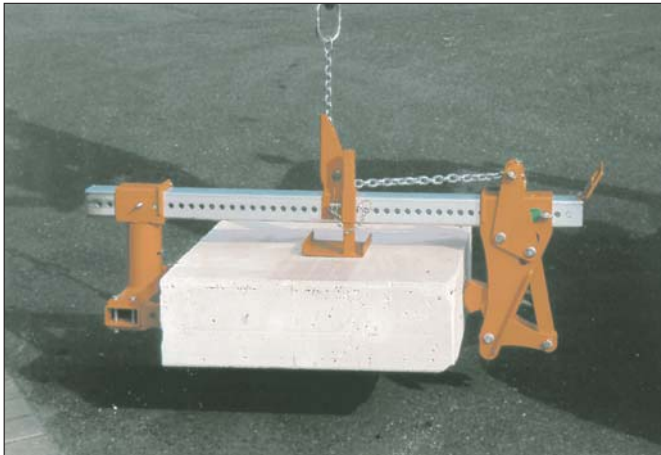

The boulder grab was developed for the simple transport of irregular stones and boulders. Of course, elements with parallel sides can also be transported.

The large lever transmission and the rotating clamping jaw guarantee a stable load handling. The roughly profiled clamping jaws ensure a safe gripping. The clamping jaws can be replaced by hardened tips.

The holding down device is adjustable in height.

When handling asymmetrical loads with an eccentric center of gravity the suspension eye can be exactly positioned above the center of gravity. The clamping jaws can be adjusted on both sides via bolts.

The boulder grab can be used with any material handling lifting equipment near to the ground. Remove bolt when picking up the load. When setting down the load the bolt will snap in by itself and the grab opens automatically.

Paint: orange, RAL 2000; beam and joining elements are galvanized.

Application made for patent.

Specification:

Carrying capacity:	1,000 kg	Total length:	approx. 1,500 mm
Clamping range:	0 - 920 mm	Total width:	approx. 470 mm
Rotating range:	on both sides approx. 15°	Total height:	650 mm
Gripping depth:	approx. 250 mm		

<i>Order No.</i>	Model	Carrying Capacity	Clamping Range *	Weight
316 500	Boulder Grab STG 1-100	1,000 kg	0 - 920 mm	65 kg

* for parallel sides

Special designs upon inquiry.