


PIPE GRAB



RGA-300 with cantilever KA-300 for the automatic fork lift transport



Pipe Grab RG 3,5 with simultaneous, stepless adjustment to the inside diameter via rack jack winch

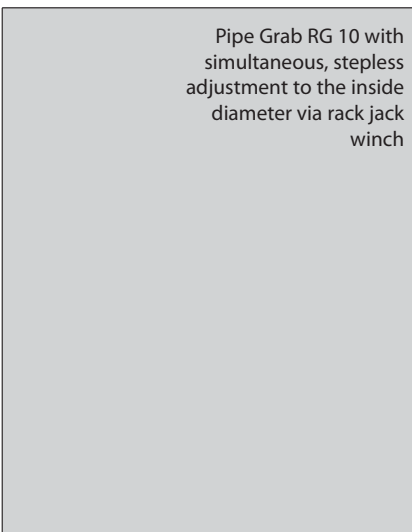

Pipe Grab RG 10 with simultaneous, stepless adjustment to the inside diameter via rack jack winch



- One man operation via mechanical automatic switching equipment
- Fast and safe pipe transport
- Applicable on every hoist

Order No.	Model	Carrying Capacity kg	Inside Diameter mm	Wall Thickness mm	Clamping Jaws	Weight approx. kg
112 010	RGA 300	3,000	800 - 2,500	90 - 200	3 units / steel	205
112 510	Cantilever KA	3,000				115
112 602	RG 3,5	3,500	400 - 800	45 - 60	2 units / rubber coating	230
112 603	RG 10	10,000	900 - 1,600	60 - 100	2 units / rubber coating	1,070